

BULLET AHD/CVI/TVI

SCAVGN40

General Features :



IR LED: Φ 5X42PCS IR range: 40M

2.8-12mm Manual Zoom Lens (2M Pixels)

Water resistance: IP66 2-Axis cable built-in bracket

Size: 220W)x80(H)x80(D)mm

Weight: 1.4kg

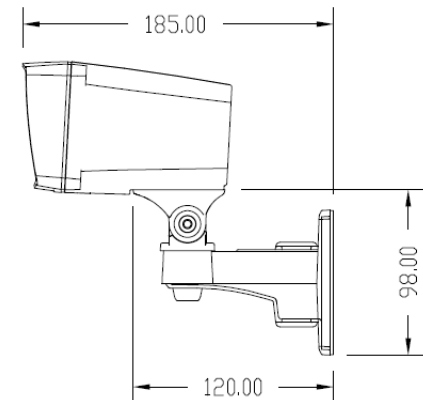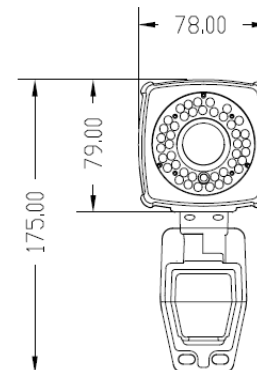

Email: info@senscam.com



Model N O.	SCAVGN 40A100	SCAVGN4 0A130	SCAVGN4 0A200M	SCAVGN4 0A200H	SCAVGN 40C130L	SCAVGN4 0C130M	SCAVGN4 0C130H	SCAVGN4 0C200M	SCAVGN4 0C200H	SCAVGN4 0V130M	SCAVGN4 0V130H	SCAVGN4 0V130	SCAVGN4 0V200M	SCAVGN40V20 0H
Video Output Mode	AHD/CVBS	AHD/CVBS	AHD/CVBS	AHD/CVBS	CVI/CVBS	CVI	CVI/CVBS	CVI	CVI	TVI/CVBS	TVI/CVBS	TVI	TVI	TVI
Camera														
Image Sensor	OV9712S	IMX225	OV2710	IMX322	OV9750	AR0130	IMX225	OV2710	IMX322	OV9750	IMX225	IMX238	OV2710	IMX322
DSP	NVP2431H	NVP2431H	NVP2441H	NVP2441H	HTC960	FH8521+DH9801	HTC960	FH8530C	FH8530C	HTC960	HTC960	FH8521+TP2801	FH8531+TP2801	FH8531+TP2801
Image Resolution	720P/960H	960P/960H	1080P/960H	1080P/960H	960P/960H	960P	960P/960H	1080P	1080P	960P/960H	960P/960H	960P	1080P(960H)	1080P(960H)
Effective Pixels	1.0MP, 1280x720	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.4MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080
TV System	PAL/NTSC													
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s													
Sync System	Internal													
Usable Illumination	0.01Lux	0.005Lux	0.001Lux	0.001Lux	0.01Lux	0.01Lux	0.005Lux	0.01Lux	0.01Lux	0.01Lux	0.005Lux	0.001Lux	0.01Lux	0.01Lux
S/N Ratio	≥50dB													
Scanning System	Progressive Scan													





Lens														
Focus Length		2.8-12mm												
Focus Control		Manual												
Lens Type		Manual												
Pixels		2M Pixels												
Auto Iris Support		NO												
Night Vision														
Infrared LED		Φ 5X42PCS												
Infrared Distance		40M												
IR Status		Under 10 Lux by CDS												
IR Power On		CDS Auto Control												
Camera Features														
Day/Night	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W





OSD Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
White Balance	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Gain Control	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Noise Reduction	3D NR	3D NR	3D NR	3D NR	2D NR	3D NR	2D NR	2D NR	2D NR	2D NR	2D NR	2D NR	3D NR	2D NR
Picture Adjustment	YES	YES	YES	YES	NO	YES	NO	YES	YES	NO	NO	NO	YES	YES
WDR	DWDR	DWDR	DWDR	DWDR	NO	WDR	NO	WDR	WDR	NO	NO	NO	WDR	WDR
OSD Support	YES	YES	YES	YES	NO	NO	NO	NO	NO	NO	NO	No	Optional	Optional

General	
Weatherproof Housing	YES, IP66
Anti-cut Bracket	YES, 2-Axis
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max

Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension	220(W) x 80(H) x 80(D)mm
Weight	1.4Kg

