



BULLET AHD/CVI/TVI

SCAVHN30

General Features :

Focus Length Board Lens 3.6mm/F2.0

Pixels 2M Pixels



Auto Iris Support NO

Infrared LED Φ 5X36PCS

Infrared Distance 30M

IR Status Under 10 Lux by CDS

IR Power On CDS Auto Control

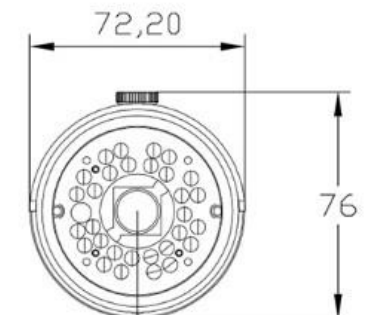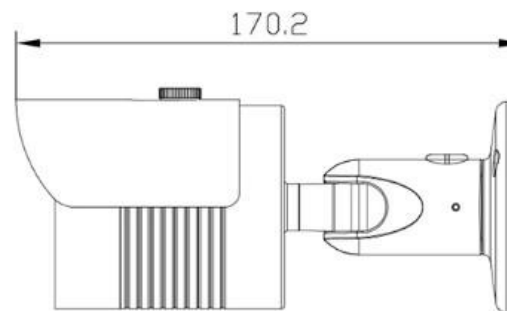



Model N O.	SCAVHN30A100	SCAVHN30A130	SCAVHN30A200M	SCAVHN30A200H	SCAVHN30C130L	SCAVHN30C130M	SCAVHN30C130H	SCAVHN30C200M	SCAVHN30C200H	SCAVHN30V130M	SCAVHN30V130H	SCAVHN30V130	SCAVHN30V200M	SCAVHN30V200H
Video Output Mode	AHD/CVBS	AHD/CVBS	AHD/CVBS	AHD/CVBS	CVI/CVBS	CVI	CVI/CVBS	CVI	CVI	TVI/CVBS	TVI/CVBS	TVI	TVI	TVI
Camera														
Image Sensor	OV9712S	IMX225	OV2710	IMX322	OV9750	AR0130	IMX225	OV2710	IMX322	OV9750	IMX225	IMX238	OV2710	IMX322
DSP	NVP2431H	NVP2431H	NVP2441H	NVP2441H	HTC960	FH8521+DH9801	HTC960	FH8530C	FH8530C	HTC960	HTC960	FH8521+TP2801	FH8531+TP2801	FH8531+TP2801
Image Resolution	720P/960H	960P/960H	1080P/960H	1080P/960H	960P/960H	960P	960P/960H	1080P	1080P	960P/960H	960P/960H	960P	1080P(960H)	1080P(960H)
Effective Pixels	1.0MP, 1280x720	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.4MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080
TV System	PAL/NTSC													
Electronic Shutter	1/25s~1/50,000s, 1/30s~1/60,000s													
Sync System	Internal													
Usable Illumination	0.01Lux	0.005Lux	0.001Lux	0.001Lux	0.01Lux	0.01Lux	0.005Lux	0.01Lux	0.01Lux	0.01Lux	0.005Lux	0.001Lux	0.01Lux	0.01Lux
S/N Ratio	≥50dB													





Scanning System	Progressive Scan
Lens	
Focus Length	Board Lens 3.6mm/F2.0
Focus Control	Fixed
Lens Type	Fixed
Pixels	2M Pixels
Auto Iris Support	NO
Night Vision	
Infrared LED	5X36PCS
Infrared Distance	30M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Camera Features	



Day/Night	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W
OSD Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
White Balance	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Gain Control	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Noise Reduction	3D NR	3D NR	3D NR	3D NR	2D NR	3D NR	2D NR	2D NR	2D NR	2D NR	2D NR	3D NR	2D NR	2D NR
Picture Adjustment	YES	YES	YES	YES	NO	YES	NO	YES	YES	NO	NO	NO	YES	YES
WDR	DWDR	DWDR	DWDR	DWDR	NO	WDR	NO	WDR	WDR	NO	NO	NO	WDR	WDR
OSD Support	YES	YES	YES	YES	NO	NO	NO	NO	NO	NO	NO	No	Optional	Optional
General														
Weatherproof Housing	YES, IP66													



Anti-cut Bracket	YES, 3-Axis
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension	177(W)x76(H)x74(D)mm
Weight	700g