


DOME HD IP CAMERAS

SCADC20

General Features :

CS Lens 6mm/F2.5 (2MP)

☿ 18.5X2PCS ARRAY IR, IR Distance: 20M

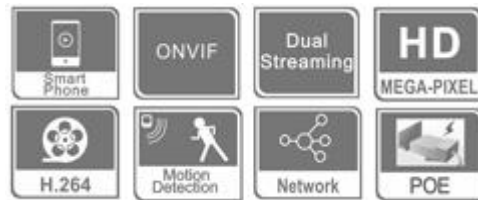

Model NO.	SCADC20H130	SCADC20H200	SCADC20H400	SCADC20M200	SCADC20M400	SCADC20E200	SCADC20E300	SCADC20H500
Camera								
Image Sensor	IMX238	IMX222	OV4689	OV2710	OV4689	IMX322	IMX124	IMX178



Main processor	HI3518C	HI3516C	Hi3516D	GM8136S	GM8138S	A5S66	S2L	HI3516A
Resolution	960P	1080P	1.5K	1080P	1.5K	1080P	1080P	2K
Effective Pixels	1280(H)*960(V)	1920(H)*1080(V)	2688 (H) *1520 (V)	1920(H)*1080(V)	2688 (H) *1520 (V)	1920(H)*1080(V)	2048(H)*1536(V)	2592(H)*1944(V)
TV System	PAL/NTSC							
Electronic Shutter Time	Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec							
Sync System	Internal	Internal	External	Internal	External	External	External	External
Usable Illumination	0.01Lux	0.01Lux	0.01Lux	0.01Lux	0.01Lux	0.01Lux	0.1Lux	0.01Lux
S/N Ratio	≥52dB							
Scanning System	Progressive							
Video Output	Network							
Lens								
Focus Length	Board Lens 6mm/F2.0							
Focus Control	Fixed							
Lens Type	Fixed							
Pixels	2M Pixels	3M Pixels	4M Pixels	3M Pixels	4M Pixels	3M Pixels	3M Pixels	5M Pixels
Night Vision								



Infrared LED	Φ 42X2PCS							
Infrared Distance	40M							
IR Status	Under 10 Lux By CDS							
IR Power On	CDS Auto Control							
Network								
Ethernet	RJ-45 (10/100Base-T)							
Protocol	IPv4, HTTP, TCP/IP, FTP, NTP, RTSP, UDP, SMTP, DNS, DDNS							
ONVIF	Support ONVIF 2.4							
P2P	YES, Support QR Code							
POE	Optional, Support IEEE 802.3af							
WIFI	N/A							
Video Delay	0.3S (Within the Lan)							
Main Stream	1280*960@30fps	1920*1080@30fps	2688*1520@30fps	1920*1080@30fps	2688*1520@30fps	1920*1080@30fps	1920*1080@30fps	2592*1944@30fps
Sub Stream	704*576@30fps, 352*288@30fps	704*576@30fps, 352*288@30fps	704*576@30fps	704*576@30fps, 352*288@30fps	704*576@30fps	704*576@30fps, 352*288@30fps	704*576@30fps	704*576@30fps
IE Brower	IE6-11, Google Chrome(IE Tab), Firefox(IE Tab)							





Smart Phone	iPhone, iPad, Android, Android Pad
Camera Features	
Day/Night	Color/ B&W (IR-CUT)
Compression	H.264/JPEG for 2MP/3MP/4MP, H.265/H.264/JPEG for 5MP, Support record AVI format.
Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, BLC, FLK(Flicker Control)
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
WDR	YES
Recording Mode	NVR/NAS/CMS/Web
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian
General	
Housing	Vandalproof(metal)
Anti-cut Bracket	NO, Without Bracket
IR Cut Filter	YES
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max



Power Source	DC12V±10%, 700mA
Dimension	Φ 120 x 100(H)mm
Weight	800g

