



FIXED BULLET IR CAMERAS

SCAVBG20

General Features :

2M Pixels Fixed CS Lens 6mm/F2.5 (3MP)

Φ 18.5X2PCS ARRAY IR ,IR Distance: 40M

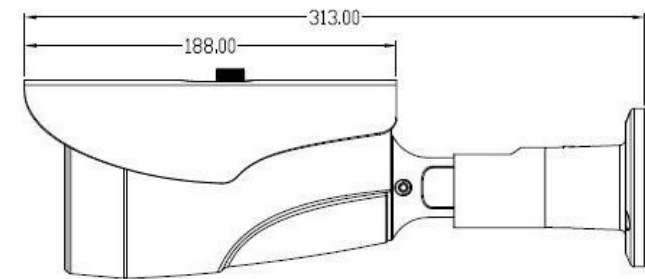



Model NO.	SCAVBG20A100	SCAVBG20A130	SCAVBG20A200	SCAVBG20C130	SCAVBG20C200	SCAVBG20V130	SCAVBG20V200
Camera							
Image Sensor	OV9712S	IMX238	IMX322	AR0130	OV2710	IMX238	OV2710
DSP	NVP2431H	NVP2431H	NVP2441H	DH9801	FH8530C	TP2801	FH8531
Image Resolution	720P/960H	960P/960H	1080P/960H	960P	1080P	960P	1080P
Effective Pixels	1.0MP, 1280x720	1.4MP, 1280x960	2.4MP, 1920x1080	1.3MP, 1280x960	2.1MP, 1920x1080	1.4MP, 1280x960	2.1MP, 1920x1080
TV System	PAL/NTSC						
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s						
Sync System	Internal						
Usable Illumination	0.01Lux	0.001Lux	0.001Lux	0.01Lux	0.01Lux	0.001Lux	0.01Lux
S/N Ratio	≥50dB						
Scanning System	Progressive Scan						
Video Output Mode	AHD/CVBS (960H) (BNC)	AHD/CVBS (960H) (BNC)	AHD/CVBS (960H) (BNC)	CVI(BNC)	CVI(BNC)	TVI(BNC)	TVI(BNC)
Lens							
Focus Length	Board Lens 3.6mm/F2.0						
Focus Control	Fixed						



Lens Type	Fixed						
Pixels	2M Pixels						
Auto Iris Support	NO						
Night Vision							
Infrared LED	Φ 18.5X2PCS						
Infrared Distance	40M						
IR Status	Under 10 Lux by CDS						
IR Power On	CDS Auto Control						
Camera Features							
Day/Night	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W
OSD Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	No	No	No	No
White Balance	Auto/Manual	Auto/Manual	Auto/Manual	Auto	Auto	Auto	Auto
Gain Control	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Noise Reduction	3D NR	3D NR	3D NR	3D NR	2D NR	3D NR	2D NR
Picture Adjustment	Yes	Yes	Yes	No	No	No	No
OSD Support	Yes	Yes	Yes	No	No	No	No
General							



Weatherproof Housing	YES, IP66
Anti-cut Bracket	YES, 3-Axis
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension	291.5(W)x101.5(H)x97.5(D)mm
Weight	1.7kg

