


BULLET HD IP CAMERAS



SCAVBG20H500

General Features :

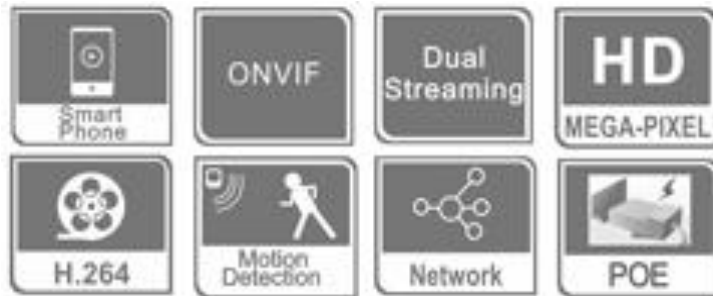



Model NO.	SCAVBG20H500
Camera	
Image Sensor	IMX178
Main processor	HI3516A
Resolution	2K
Effective Pixels	2592(H)*1944(V)
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec
Sync System	External
Usable Illumination	0.01Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Lens	
Focus Length	CS 6mm/F2.0
Focus Control	Fixed
Lens Type	Fixed
Pixels	5M Pixels
Night Vision	
Infrared LED	Φ 42X2PCS
Infrared Distance	40M
IR Status	Under 10 Lux By CDS
IR Power On	CDS Auto Control
Network	



Ethernet	RJ-45 (10/100Base-T)
Protocol	IPv4, HTTP, TCP/IP, FTP, NTP, RTSP, UDP, SMTP, DNS, DDNS
ONVIF	Support ONVIF 2.4
P2P	YES, Support QR Code
POE	Optional, Support IEEE 802.3af
WIFI	N/A
Video Delay	0.3S (Within the Lan)
Main Stream	2592*1944@30fps
Sub Stream	704*576@30fps
IE Brower	IE6-11, Google Chrome(IE Tab), Firefox(IE Tab)
Smart Phone	iPhone, iPad, Android, Android Pad
Camera Features	
Day/Night	Color/ B&W (IR-CUT)
Compression	H.265/H.264/JPEG , Support record AVI format.
Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, BLC, FLK(Flicker Control)
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
WDR	YES
Recording Mode	NVR/NAS/CMS/Web
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian
General	
Housing	Weatherproof , IP66
Anti-cut Bracket	NO, Without Bracket



IR Cut Filter	YES
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension	291.5(W)x101.5(H)x97.5(D)mm
Weight	1.7kgs

