

BULLET AHD/CVI/TVI

SCAVK40

General Features :



IR Bullet IP66, 2.8-12mm Varifocal Lens, 40m Night Vision

Sensor: SONY\Aptina\OmniVision

DSP: Hisilicon\TI \ Ambarella

ONVIF 2.4, NVR\CMS\Web Recording

1080P\P2P\POE\IR-CUT

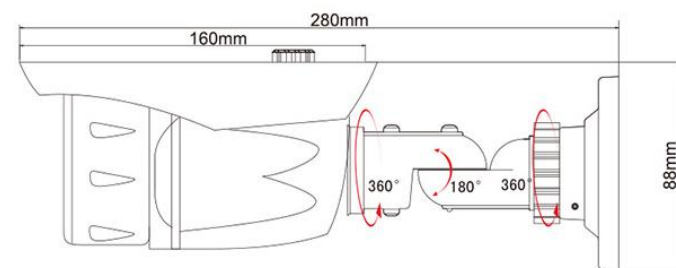

Model N O.	SCAVK40 A100	SCAVK40 A130	SCAVK40 A200M	SCAVK40 A200H	SCAVK4 0C130L	SCAVK40 C130M	SCAVK40 C130H	SCAVK40 C200M	SCAVK40 C200H	SCAVK40 V130M	SCAVK40 V130H	SCAVK40 V130	SCAVK40 V200M	SCAVK40V200 H
Video Ou tput Mod e	AHD/CV BS	AHD/CVB S	AHD/CVB S	AHD/CVB S	CVI/CV BS	CVI	CVI/CVBS	CVI	CVI	TVI/CVBS	TVI/CVBS	TVI	TVI	TVI
Camera														
Image Sen sor	OV9712S	IMX225	OV2710	IMX322	OV9750	AR0130	IMX225	OV2710	IMX322	OV9750	IMX225	IMX238	OV2710	IMX322
DSP	NVP2431 H	NVP2431H	NVP2441H	NVP2441H	HTC960	FH8521+D H9801	HTC960	FH8530C	FH8530C	HTC960	HTC960	FH8521+TP 2801	FH8531+TP 2801	FH8531+TP2801
Image Res olution	720P/960 H	960P/960H	1080P/960 H	1080P/960 H	960P/960 H	960P	960P/960H	1080P	1080P	960P/960H	960P/960H	960P	1080P(960 H)	1080P(960H)
Effective P ixels	1.0MP, 12 80x720	1.3MP, 128 0x960	2.1MP, 192 0x1080	2.4MP, 192 0x1080	1.3MP, 1 280x960	1.3MP, 128 0x960	1.3MP, 128 0x960	2.1MP, 192 0x1080	2.4MP, 192 0x1080	1.3MP, 128 0x960	1.3MP, 128 0x960	1.4MP, 128 0x960	2.1MP, 192 0x1080	2.4MP, 1920x10 80
TV System	PAL/NTSC													
Electroni c Shutter	1/25s~1/50,000s , 1/30s~1/60,000s													
Sync Syste m	Internal													
Usable Illu mination	0.01Lux	0.005Lux	0.001Lux	0.001Lux	0.01Lux	0.01Lux	0.005Lux	0.01Lux	0.01Lux	0.01Lux	0.005Lux	0.001Lux	0.01Lux	0.01Lux
S/N Ratio	≥50dB													
Scanning S	Progressive Scan													



ystem	
Lens	
Focus Length	2.8-12mm
Focus Control	Manual
Lens Type	Manual
Pixels	2M Pixels
Auto Iris Support	NO
Night Vision	
Infrared LED	5X42PCS
Infrared Distance	40M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Camera Features	

Day/Night	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W
OSD Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
White Balance	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Gain Control	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Noise Reduction	3D NR	3D NR	3D NR	3D NR	2D NR	3D NR	2D NR	2D NR	2D NR	2D NR	2D NR	2D NR	3D NR	2D NR
Picture Adjustment	YES	YES	YES	YES	NO	YES	NO	YES	YES	NO	NO	NO	YES	YES
WDR	DWDR	DWDR	DWDR	DWDR	NO	WDR	NO	WDR	WDR	NO	NO	NO	WDR	WDR
OSD Support	YES													

YES

General	
Weatherproof Housing	YES, IP66
Anti-cut Bracket	YES, 3-Axis
Dual Voltage	NO

IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension	228(W)x97(H)x82(D)mm
Weight	1.4Kg

